

1852

The inspiration for the brand comes from the maritime environment.

A nautical mile is a unit of measurement of distance used at sea, in the air and in meteorology.

An international nautical mile is exactly 1852 meters.

If you sail for one hour at a speed of one knot, you have sailed one nautical mile.

1852 Produced especially for Palby Marine in Denmark, Nautec in Sweden and Flak in Norway.

We have over 1000 products from 1852 in our range.

The products range widely - from wetsuits to polishing machines, rubber boots, binoculars, oil, melamine tableware, water sports etc.

1852 See CR50 COMPRESSOR REFRIGERATOR

Compressor refrigerator, 12/24V DC - 5/2.5 Amp - 60W

- Noise level: <45dB
- Right- or left-handed door
- With LG compressor @ us
- Remove freezer for larger cold room
- Storage volume: approx. 48 litres, including 9.5 liter freezer compartment
- Weight: 17 kg
- Dimensions (W x H x D): 380 x 534 x 500 mm

1283258

Refrigerator frame for CR50 1283259








1852 See CR65 COMPRESSOR REFRIGERATOR

Compressor refrigerator, 12/24V DC - 5/2.5 Amp - 60W

- Noise level: <45dB
- Right- or left-handed door
- With LG compressor @ 🝱
- Remove freezer for larger cold room
- Storage volume: approx. 65 litres, including 18 liter freezer compartment
- Weight: 19 kg
- Dimensions (W x H x D): 470 x 630 x 431 1283261

Refrigerator frame for CR65 1283262

Refrigerator door panel optional Stainless steel 1283261-1









1283262





1852 COMPRESSOR ICE CUBE MACHINE ICE16

Never go down on ice cubes for your drinks!

Fill the tank with water and select on the LED panel which size ice cube you want.

In just 7 minutes, the machine produces your ice cubes.

- 700 g ice cube tray
- The ice machine has a handle so it is easy to move around.
- 12V/24V/240V
- 1.2 / 0.5 Amp
- Noise level: <45dB
- Dimensions (L x W x H): 355 x 238 x 351 mm
- Weight 9.2 kg
- Universal power supply for cigar plugs with 2.5 meter cable 1283265









700 g ice cube bucket & ice scoop



Makes oblong ice cubes

ICEMASTER® PRO COOLER/ICE BOXES

The IceMaster® Pro combines performance, strength and durability and can keep ice frozen for more than 6 days.

- Ice cream can be kept frozen for more than 6 days (tested at 25°C)
- 50 mm thick CFC-free PU foam insulation
- Food-approved silicone rubber ring in lid
- FDA food approved PP inside
- 2-way attachment points for safe transport
- Black stainless steel brackets/locks
- Double drain for emptying (fast/slow)
- Heavy duty handle & bottle opener
- Tape measure punched on the lid



2-way attachment points for safe transport



Black stainless steel fittings/locks



Heavy duty handle & bottle opener




Double drain for emptying (fast/slow)



Tape measure punched on the lid



Food-approved silicone rubber ring in lid







Accessories: basket, freezer element & cutting board/room

For Pro 50 1283296 For Pro 70 1283298 For Pro 120 1283299



CEMASTER

Icemaster Pro 50 liters

L: 70,7 x B: 37,2 x H: 38,0 cm External size: Internal size: L: 60,0 x B: 29,5 x H: 26,9 cm 1283292



Icemaster Pro 70 liters

L: 75,6 x B: 42,3 x H: 44,4 cm External size: Internal size: L: 64,9 x B: 33,0 x H: 31,6 cm 1283293



Icemaster Pro 120 liters

External size: L: 90,0 x B: 50,0 x H: 52,5 cm Internal size: L: 77,8 x B: 39,5 x H: 37,8 cm 1283294

4

1852 COMPRESSOR COOLER BOX 55 LITRES

 $1852\ compressor$ cooler box is perfect for the boat, the car, the caravan The refrigerator with double zone

- LCD display/ control panel
- USB outlet for mobile phone charging, lamps, tablets, etc.
- 3-step battery protection
- Both for 12/24 Vdc or 110-240 Volt
- \bullet Compressor cooling or freezing down to -20 $^{\circ}\text{C}$
- With LG compressor name
- Universal power supply for cigar plugs with 2.5 meter cable

55 liters w/LED light, which lights up when the lid is opened

Equipped with strong carrying handles and a display that shows the temperature.

Lid can be opened to both sides

Digital panel that allows you to simple and economical control of the cooling box. Can be controlled via app.

2-part Cool/freeze or Cool/cool - Freeze/freeze Weight 17 kg


Size 647 x 400 x 571 mm (+ 25 mm on each side) Consumption 5 (12V)/2.5 (24V) Amp - 0.25 Kw.h/24T

Average power consumption: 60W











1852 S COMPRESSOR COOLER BOX 95 LITRES

1852 compressor cooler box is perfect for the boat, car, caravan etc. The cooling box is a 2-part fridge/freezer

- LCD display/ control panel
- USB outlet for mobile phone charging, lamps, tablets, etc.
- 3-step battery protection
- Both for 12/24 Vdc or 110-240 Volt
- Compressor cooling or freezing down to -20°C
- With LG compressor 🔞 🝱
- Universal power supply for cigar plugs with 2.5 meter cable

95 liters w/LED light, which turns on when the lid is opened

Equipped with strong carrying handles and a display that shows the temperature.

Lid can be opened to both sides

Digital panel that allows you to simple and economical management of the cold box.

Can be controlled via app.

2-part Cool/freeze or Cool/cool - Freeze/freeze Weight 24 kg

Size $826 \times 528 \times 465$ mm (+ 25 mm on each side) Consumption 6 (12V)/3 (24V) Amp - 0.3 Kw.h/24T **1283255**



Light when lid is opened



Bottom plug



Digital panel / Handle



1852 COMPRESSOR COOLER BOX 30, 50 LITRES

1852 compressor coolers are perfect for trips in the boat, car, caravan etc. Both models have two wheels and an adjustable handle.

- LCD display/ control panel
- USB outlet for mobile phone charging, lamps, tablets, etc.
- 3-step battery protection
- Both for 12/24 Vdc or 110-240 Volt
- Compressor cooling or freezing down to -20°C
- With LG compressor 🔞 🝱
- Universal power supply for cigar plugs with 2.5 meter cable

30 liters

Weight 11.6 kg Consumption 3.75/1.875 Amp - 0.2 Kw.h/24H Size 631 x 375 x 378 mm 1283251

40 liter


Weight 12.9 kg Consumption: 3.75/1.875 Amp - 0.2 Kw.h/24T Size 631 x 480 x 378 mm 1283252

50 liters

Weight 13.4 kg Consumption 3.75/1.875 Amp - 0.2 Kw.h/24H Size 631 x 550 x 378 mm 1283253










Digital panel

1283256

1852 SATTERY Extra battery for 1852 coolers









1852 完藝







378

350

50 liters

631











Rubber reinforcedFoldable eye pieces - great advantage

for those who wears glasses

• Viewing angle: 7.1 (119 m V/1000 m)

Water repellent



1852 3 CREW 7X50

- BK9 Prism
- Black/blue rubber reinforcement
- Foldable eye pieces great advantage for those who wears glasses

• Fully coated lenses



1852 SEE WATERSPORT 7X50

- BK-4 Prism
- Black/blue rubber reinforcement
- Foldable eye pieces great advantage for those who wears glasses

Fully multi coated lenses

• Viewing angle: 6.6 (115m/1000m)

• Waterproof

• 19.8 x 6.5 x 20.2 cm - 989 g

Center focus 1113755





1852 | See OUTDOOR 8X42

- BK-4 Prism
- Black rubber reinforcement
- Pop up eye cups
- Viewing angle: 6.6 (116m v/1000m)
- Nitrogen gas filled
- Multi Coated
- Waterproof 1.5M/30min
- 14 x 5 x 12 cm

Center focus 1113748



Distance meter/calculator

1. MATE 7X50

- BK-4 Prism
- Shock-absorbing black/blue rubber reinforcement
- Foldable eye pieces great advantage for those who wears glasses



1852 See CAPTAIN 7X50

- Shock-absorbing black/blue rubber reinforcement

• Foldable eye pieces - great advantage for those who wears glasses



1852 **GOMMANDER 7X50**

- BK-4 Prism
- Rubber reinforced
- Foldable eye pieces great advantage for those who wears glasses
- Fully coated lenses
- Viewing angle: 6.6 (115 m v/1000 m)
- Nitrogen gas filled
- Waterproof
- Bearing compass with scale and light
- 19.8 x 6.5 x 20.2 cm 989 g



1852 3 ADMIRAL 7X50

- BK-4 Prism
- Shock-absorbing blue rubber reinforcement
- Viewing angle: 7 (132m v/1000m)
- Eye lenses 23 mm
- Foldable eye pieces great advantage for those who wears glasses
- Nitrogen gas filled
- Full multi coated lenses
- Waterproof & fog-free
- Digital compass, barometer, thermometer & altimeter



1852 BRACKET MOUNTED COMPASS WITH LIGHT

- Ø 70 mm
- White or black
- 12V light
- Bulkhead or flush mounted

Black with bracket 1111714

White with bracket 1111715



1852 WHF ANTENNAS





VHF sailboat antenna with stainless steel whip, 99 cm, 6 dBi, bracket and SO239 connector 1114001

VHF motor boat antenna with fiberglass whip, 105 cm, 7 meter cables, 2 connectors UHF & FME

- LNB frequency range 156/162 MHz
- Gain 3dB
- 1114005



VELOX MARINE BLUETOOTH KIT WITH SPEAKER AND CONTROL

A perfect music system for small boats from VELEX. 2 pcs. 6.5" marine speakers included.
Class A/B amplifier with 180W max output.

- Bluetooth
- 4 channels
- 4 x 45W 4 Ohm amplifier
- Control panel IP 67 with light and 10-foot cable
- Amplifier IP6
- USB/AUX
- 1 Amp USB port

1114875



VELOX MARINE RADIO SET DAB+/FM WITH 2 SPEAKERS

A very good quality stereo package from VELEX. Two 6.5" speakers are included.

- Bluetooth
- DAB+/FM
- 4x45W
- IPX5
- USB/Aux, Motorola and Phono Out
- Ø 89 mm
- FM antenna for external mounting included

NB! DAB+ antenna is not included in the set. **1114876**



PROMARINE BLUETOOTH SPEAKER

2-way bluetooth speaker starter kit w/amplifier 6.5"

12V for speakers that can be connected to a phone or other playback device via Bluetooth. There is a master speaker and a slave speaker in the set, and you can connect as many slave speakers as you want, they just have to be within 30 meters of the master unit.


Masters

• 150W

• 20W amplifier in the speakers

- IPX5
- Low magnetism
- UV protected
- Installation depth: 79 mm
- Diameter: 175 mm
- Hole dimensions: 158 mm
- Range to play source max 20 m
- Range between master and slave max 30 m


Black **1114866** White **1114867**



For those who want more than 2 speakers

White 1114868 Black 1114869









The inverters convert 12 V to 220 V 50 Hz with effects from 150 W to 1000 W. Inverters with a modified sine curve are ideal for connecting TVs, mobile phone chargers, small kitchen appliances, tools, etc. Always pay close attention to the power (W) stated on the appliance you want to connect the inverter to before connecting it.


ATTENTION Many consumables use 3-4 times more power at the start moment!

The inverters with a modified sine curve have **SOFTSTART**, which means that it can withstand the large starting consumption, so you can choose your inverter according to the power that is written on the item of use, and not 3-4 times more powerful.


Modified sine curve: Modified sine curve is an angular current curve, the current we know from our house is a "pure" current.

C € RoHS





Item no	1250460	1250461	1250462	1250463
AC Output (continuously)	150W	300W	500W	1000W
AC peak load	300W (2 sek)	600W (2 sek)	1000W (3 sek)	2000W (2 sek)
DC input voltage	10,5-15Vdc	10,5-15Vdc	10,5-15Vdc	10,5-15Vdc
Low input indication	10,5V +/- 0,5V	10,5V +/- 0,5V	10,5V +/- 0,5V	10,5V +/- 0,5V
High input indication	16V +/- 0,5V	16V +/- 0,5V	16V +/- 0,5V	16V +/- 0,5V
Congestion shut down	180W	360W	600W	1200W
Protected against short circuit	√	√	√	√
Fan	√	√	√	√
USB socket	√	√	√	√
AC output voltage	230Vac	230Vac	230Vac	230Vac
AC output voltage curve	Modified	Modified	Modified	Modified
Efficiency at full load	85%	85%	85%	85%
Consumption without load	0,21A	0,23A	0,28A	0,37A
Dimensions in mm	120x100x50	120x100x50	150x100x50	210x150x70
Weight	0,55 kg	0,65 kg	0,85 kg	1,9 kg



Inverters with a modified sine curve are ideal for connecting: TV, mobile phone chargers, small kitchen appliances, tools, etc

1852 S INVERTERS WITH PURE SINE CURVE

The inverters convert 12 V to 220 V 50 Hz with effects of 400 W and 1000 W. Pure sine wave inverters can be used for all electrical equipment. Always pay close attention to the power (W) stated on the appliance you want to connect the inverter to before connecting it.

ATTENTION Many consumables use 3-4 times more power at the start moment!


The inverters with a modified sine curve have **SOFTSTART**, which means that it can withstand the large starting consumption, so you can choose your inverter according to the power that is written on the item of use, and not 3-4 times more powerful. **PURE sine curve:** is the same current that we have in our houses.

C € RoHS









			4
Item no	1250466	1250467	1250468
AC Output (continuously)	400W	1000W	1500W
AC peak load	800W	2000W	3000W
DC input voltage	10,5-15Vdc	10,5-15Vdc	10,5-15Vdc
Low input indication	10,5V +/- 0,5V	10,5V +/- 0,5V	10,5V +/- 0,5V
High input indication	16V +/- 0,5V	16V +/- 0,5V	16V +/- 0,5V
Congestion shut down	480W	1200W	1800W
Protected against short circuit	√	√	√
Fan	√	√	√
USB socket	√	√	√
AC output voltage	230Vac	230Vac	230Vac
AC output voltage curve	Pure	Pure	Pure
Efficiency at full load	90%	90%	90%
Consumption without load	0,40A	0,50A	0,56A
Dimensions in mm	160x150x70	310x150x70	290x220x90
Weight	1,5 kg	3 kg	4,2 kg

1852 remotecontrol for 1852 inverter **1250470**





1852 PRO SMART CHARGERS

Universal smart chargers that are very simple to use. Available in 3 models - 4 Amp - 8 Amp. - 16/8 Amp.

- With crocodile beak and ring cable lugs
- Charging: Fast, slow and winter mode
- LCD display with light
- Built-in battery tester.
- Short circuit protected
- Charges all batteries including lithium.

4 Amp

• 6V og 12V

1251000

8 Amp

- 12V
- 9 stage charging
- Desulfation extends battery life 1251001

16/8 Amp

- 12/24V
- 9 stage charging
- Desulfation extends battery life



BATTERY BOX HOLDER

Battery box holder for trailer hitch Aluminum 1170735 1170738





1852 FINNED COPPER CABLE

High temperature thin wall low voltage cables suitable for use in marine and other harsh environments.

The tinned copper conductors make this cable more corrosion resistant.

- Manufactured in accordance with ISO 6722-1: 2011 (Class B).
- Hard PVC insulation saves weight and provides good resistance to wear and can be cut through.
- Good resistance to petrol, diesel oil, lubricating oils and diluted acid.
- Suitable for 12V and 24V systems (max. 60V).
- Insulated copper conductors, PVC insulated.
- Suitable for use at temperatures from -40°C to 105°C. • Very good resistance to moisture.
- The cables are printed with the specification on the insulation.

SINGLE INSULATED TINNED MOUNTING CABLE:

Colour	Cross section	Outside mm	Roll lgt	ltem no
Red	1,5 mm ²	Dia 2,4	10 meter	1253121
Black	1,5 mm ²	Dia 2,4	10 meter	1253125
Red	2,5 mm ²	Dia 3,0	10 meter	1253131
Black	2,5 mm ²	Dia 3,0	10 meter	1253135
Red	4,0 mm ²	Dia 3,7	10 meter	1253139
Black	4,0 mm ²	Dia 3,7	10 meter	1253143
Red	6,0 mm ²	Dia 4,3	10 meter	1253147
Black	6,0 mm ²	Dia 4,3	10 meter	1253151
Red	10,0 mm ²	Dia 6,0	5 meter	1253155
Black	10,0 mm ²	Dia 6,0	5 meter	1253159



SINGLE INSULATED EXTRA FLEXIBLE BATTERY/WELDING CABLES DESIGNED FOR USE IN HARSH WORKING ENVIRONMENTS.

Colour	Cross section	Outside mm	Roll lgt	Item no
Red	16 mm ²	Dia 8,3	10 meter	1253175
Black	16 mm ²	Dia 8,3	10 meter	1253179



2-CONDUCTOR ROUND TINNED COPPER CABLE:

Colour	Cross section	Outside mm	Roll Igt	Item no
Red/black	2 x 1,5 mm ²	Dia 6,4	10 meter	1253163
Red/black	2 x 2,5 mm ²	Dia 6,7	10 meter	1253165





Small packaging from 5 to 10 meters

1852 SEARCHLIGHT T-TRON LED 48W WITH REMOTE CONTROL

The latest generation of remote searchlight. The latest LED technology from Osram; 16 diodes of 3W, a total of 48 Watts.

The housing is in aluminum and the grille is magnesium coated to make it extra robust.

- 10-30V (can be used on 12V and 24V systems)
- 48W
- 4320 lumens
- Lux/10m 1600lx
- Light cone: Spot 10° / Flood 90°
- Range Spot 750 m / Flood 150 m
- Lateral rotation: 360°
- Rotation up/down: 180°
- Dim. max: H 244 x W 235 x D 200 mm
- Remote control with a range of 35 m
- Remote control comes without battery
- IP65

1240090





1852 SEARCHLIGHT LED WITH WIRELESS REMOTE CONTROL 50 WATT

LED searchlight with ABS housing

- IP67
- 50W
- 3500 lumens
- Light cone: 30°
- 10-30V (can be used on 12V and 24V systems)
- Working temperature: -10 50°C
- 6500K white
- 1240063





STORM LANTERN

Original classic Dietz storm lantern for kerosene/lamp oil.

Width: 13 mm - Height: 250 mm Content: 210 ml - 14 hours

Fill to a maximum of 3/4 part, as the lamp expands when it is hot.





TOTRON LED DECK LIGHT

Top quality deck light with heated lens which prevents icing in cold weather. Indirect light gives higher lumen output per watt.

The deck light also has a temperature control system which

provides maximum light without damaging the LED lights.

Aluminum housing and fittings.

Combo light: spot 8° and flood 90°.

IP67 - 10-30V. 5700K










• WxHxD 206 x 78 x 58 mm

- 36W 12x3W
- 3240 lumens 1240095





Heated lens

prevents icing

Side mounting kit for Totron LED deck lights if you want side mounting 1240094






- WxHxD 359 x 78 x 58 mm
- 72W 24x3W
- 6480 lumens

1240096






- WxHxD 563x78x58 mm
- 120W 40x3W
- 10800 lumens

1240097



- WxHxD 800x78x58 mm
- 180W 60x3W
- 16200 lumens


1240098







Heated lens, which prevents

icing in cold weather.



Innovative optics design. Reflector with cover to provide indirect light



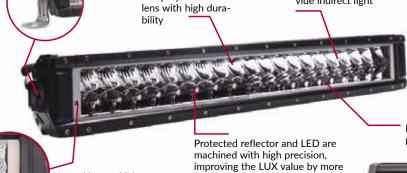

than 50%



Indirect light system prevents glare



1852 **SPOTS**

1852 spot models are of high quality, intended for the maritime environment with different brightnesses and in a very robust IP67 waterproof housing made of ABS and thermoplastic rubber, which makes them resistant to shocks and vibrations and with a drop test of 1 meter.

- IP 67 waterproof
- Drop test: 1 meter
- Non-slip handle
- Brightness Lumen 300 370M/237M
- 1 piece. Cree XPGB R5 super bright 3W LED
- Uses 3 pcs. C/LR14 batteries (not included)
- Usage: 21 hours/29 hours
- Trigger switch: high/low/off brightness
- Diameter 8 cm, weight 900 g

1240371

- Brightness Lumen 500 400M/280M
- 1 piece. Cree XMLB-T6 super bright 5W LED
- Including 1 pc. rechargeable Lithium 18650 battery (3.7V 3000mAH)
- Including 100-240V charger and 12 Vdc charger with cigarette plug.
- Charging time 6-8 hours.
- Use: 9 hours/20 hours/SOS 24 HOURS
- Trigger switch: high/low/SOS/off brightness
- Diameter 9 cm, weight 900 g


1240372



A smart LED Spot/diving light with a robust housing that floats, is waterproof.

Recharged via the supplied USB plug which can be smartly stored behind the end cover.

- 3 light settings: 100%, 50% or SOS
- IP67 floating
- Adjustable stand on top of the housing for hands-free lighting
- The housing is made of ABS and polycarbonate



Battery: 18650 lithium (2200MA)

Charging: 3 hours Usage time: 2.5 hours

Size: 15.5 x 8 x 18 cm - 354 grams

1240374

18W XHP 50 1300 lumens Battery: 18650 lithium (4400MA)

Charging: 4-5 hours Usage time: 4.5 hours


Size: 17 x 9 x 18.5 cm - 600 grams

5V input & output 1240375











Compact flashlight with impressive lumen strength, light distance and operating time. CREE high-intensity LED and polycarbonate lens resist vibrations, even drops up to 3 meters without damage. Strong housing made of reinforced nylon fiber with a soft surface, so it is comfortable to hold.

- 1 piece. 3W Cree super powerful LED
- Brightness: 140 lumens 120 meters
- Duration of use: 3 hours
- 3 x AAA batteries (not included)
- High/low and flashing brightness
- IP 67 waterproof
- Wrist strap
- Size: 13 cm Dia 30/35mm

1171045







Stainless steel fitting

We offer a wide range of AISI 316 stainless steel fittings.

1852 SSSS HOSE CONNECTOR



Inread	Hose	item no
3/8"	10 mm	1066610
3/8"	12 mm	1066620
3/8"	15 mm	1066630
1/2"	12 mm	1066650
1/2"	15 mm	1066660
1/2"	20 mm	1066670
3/4"	20 mm	1066690
3/4"	25 mm	1066700
1"	25 mm	1066720
1 1/4"	32 mm	1066740
1 1/4"	38 mm	1066750
1 1/2"	38 mm	1066760
2"	50 mm	1066770

1852 HOSE CONNECTOR MALE/MALE



Thread		
1/2"	20 mm	1066820
3/4"	25 mm	1066830
1 1/4"	38 mm	1066850

1852 3 90° ELBOW



Thread	Item no
3/8"	1067010
1/2"	1067020
3/4"	1067030
1"	1067040
1 1/4"	1067050
1 1/2"	1067060
2"	1067070

1852 90° ELBOW MALE/FEMALE



Inread	item no
3/8"	1066910
1/2"	1066920
3/4"	1066930
1"	1066940
1 1/4"	1066950
1 1/2"	1066960
2"	1066970

1852 35 45° ELBOW



Thread	Item no
3/8"	1067510
1/2"	1067520
3/4"	1067530
1"	1067540
1 1/4"	1067550
1 1/2"	1067560

1852 55 T-PIECE SS



Thread	Item no
3/8"	1067410
1/2"	1067420
3/4"	1067430
1"	1067440
1 1/4"	1067450
1 1/2"	1067460
	•

1852 PIPE CONNECTOR



Thread	Item no
3/8"	1067310
1/2"	1067320
3/4"	1067330
1"	1067340
1 1/4"	1067350
1 1/2"	1067360
2"	1067370



Thread	Item no
3/8"	1067110
1/2"	1067120
3/4"	1067130
1"	1067140
1 1/4"	1067150
1 1/2"	1067160
2"	1067170

1852 HEXAGON BUSHING SS



Thread	l	Item no
3/8"	- 1/4"	1067210
1/2"	- 3/8"	1067220
3/4"	- 1/2"	1067230
1"	- 3/4"	1067240
1 1/4"	- 1"	1067250
1 1/2"	- 1 1/4"	1067260
2"	- 1 1/2"	1067270

1852 PLUG SS EXTERNAL THREAD



Thread	Item no
3/8"	1067610
1/2"	1067620
3/4"	1067630
1"	1067640
1 1/4"	1067650
1 1/2"	1067660

1852 SEE THRU-HULLE SS



Lgt.	Thread	Item no
53	3/8"	1066010
59	1/2"	1066020
68	3/4"	1066030
73	1"	1066040
77	1 1/4"	1066050
80	1 1/2"	1066060
95	2"	1066070



Thread	Hose	Item no
3/8"	15 mm	1066080
1/2"	18 mm	1066081
3/4"	24 mm	1066082
1"	30 mm	1066083
1 1/4"	38 mm	1066084

1852 SEE THRU-HULL SS



Lgt.	Thread	Item no
53	3/8"	1066161
60	1/2"	1066162
68	3/4"	1066163
72	1"	1066164
77	1 1/4"	1066165
78	1 1/2"	1066166


1852 F THRU-HULL SS



Thread	Hose	Item no
1/2"	19 mm	1066120
3/4"	25 mm	1066130
1"	32 mm	1066140
1 1/4"	38 mm	1066150

1852 3 DRAIN

Can be used as a cockpit, sink and shower drain.



1852 WATER INTAKE SS



1852 BALL VALVE SS

Inread dia	item no	
3/8"	- 70 mm	1066210
1/2"	- 70 mm	1066220
3/4"	- 80 mm	1066230
1"	- 80 mm	1066240
1 1/4"	- 80 mm	1066250
1 1/2"	- 80 mm	1066260
2"	- 90 mm	1066270



Thread	Item no
3/8"	1066410
1/2"	1066420
3/4"	1066430
1"	1066440
1 1/4"	1066450
1 1/2"	1066460
2"	1066470

Cast AISI 316 stainless steel that is highly polished



Thread	Size mm	Item no
1/2" x 65 mm	38x38x18	1066191
3/4" x 65 mm	44x44x20	1066192
1" x 75 mm	50x50x23	1066193
1 1/4" x 79 mm	57x57x27	1066194
1 1/2" x 83 mm	65x65x31	1066195
2" x 90 mm	80x80x44	1066196

1852 SEE INSPECTION COVER SS - AISI 316



	Thread	Total dia	Assembly	Item no
	3"	114mm	Ø 90mm	1067710
	4"	146mm	Ø 12mm	1067720
Key for opening				1067730

FROST GUARD 220V/200W W/THERMOSTAT

The frost guard is suitable for keeping the boat, garage, attic or similar free from frost. Mounted vertically on the wall. Can be used in both dry and damp rooms.

Stepless thermostat +5 to +35° C L x W x H: 350 x 120 x 75 mm 1102130




1852 E DEHUMIDIFIER FOR LOW TEMP., 230V W/5 L TANK

Dehumidifier for boat, caravan, cottage, basement etc.

Dehumidifier with absorption technology, i.e. dryer rotor and no compressor therefore perfect for cold and wet rooms. Simple to operate.

- TÜV and CE approved.
- Tank 5 litres
- Spout 12mm for direct draining of water
- 8.5L per day
- Power consumption: High speed 720W/3.2Amp Medium speed 710W/3.1Amp
- Low speed 380W/1.7Amp Noise level: 39/44/48db
- Air flow 185 m3/hour
- Electronic hygrostat with the following levels: 40%/50%/60%/70% RH and continuous
- Antibacterial filter
- Operating temperature: 1-32°C
- Anti-tip protection
- Hours: 1-24 hours
- Dimensions: 340 x 221 x 509 mm
- Weight: 7.5 kg
- 230V

1100000



Humidity/Timer Display Window

- TIMER Indicator
- **AUTO** button
- AIR CLEAN Indicator 5
- 6. **FAN SPEED Button**
- **DRYER** Indicator
- 8. DRYER Button 9. Humidity Button
- 10. ON/OFF Indicator
- 11. Power (ON/OFF) Button
- 12. "Full Water" indicator
- 13. TIMER button
- 14. AIR CLEAN Button





1852 HEATER PIPE 220 VOLT CE

Heating pipes are effective against frost and condensation in the boat. They use extremely little power.

Is perfect to use for winter storage, but also provides a pleasant warmth and is far more energy efficient if used as a normal heat source. The heating pipes are equipped with a safety sensor that automatically switches off the heating pipe if a fault occurs or if the heat exceeds the normal temperature.

Supplied with 220V cord and mounting clip.

305 mm 45 watt heating pipe IP 55 1102150 610 mm 80 watt heating pipe IP 55 1102152 915 mm 135 watt heating pipe IP 55 1102154

IMPORTANT Read the instructions before installation! Energy efficient



1852 SEE CABLE LUGS

1852 tube cable lugs are made of 100 percent heavy tinned copper, which provides very good connection/flow of current resists corrosion from salt and moisture. Seamless barrel design provides maximum strength when crimped. The cable lugs have a closed end, which keeps moisture out, so cables remain dry and corrosion-free.

C-1-1:	Dalk bala	α Γ	ا ه۵	دی ا	١ ، ، ،			Th::-!	D1	l
Cable size	Bolt hole	ØE	ØD	Ød	W	В	L	Thickness	Packing	Item no
6 mm²	6 mm	6,5 mm	5,5 mm	3,8 mm	11,7 mm	10,0 mm	27,0 mm	1,0 mm	4 pcs	1274040
10 mm²	8 mm	8,1 mm	7,1 mm	4,8 m	11,7 mm	13,0 mm	33,3 mm	1,8 mm	4 pcs.	1274044
16 mm²	8 mm	8,1 mm	8,1 mm	5,8 mm	13,7 mm	15,0 mm	37,1 mm	1,8 mm	4 pcs.	1274047
16 mm²	10 mm	10,4 mm	8,1 mm	5,8 mm	13,7 mm	15,0 mm	37,1 mm	1,8 mm	4 pcs.	1274048
25 mm²	8 mm	8,1 mm	9,4 mm	7,1 mm	13,7 mm	15,5 mm	38,9 mm	2,4 mm	4 pcs.	1274050
25 mm²	10 mm	10,4 mm	9,4 mm	7,1 mm	14,5 mm	15,5 mm	38,9 mm	1,9 mm	4 pcs.	1274051
35 mm²	8 mm	8,1 mm	11,2 mm	8,4 mm	16,5 mm	16,0 mm	40,9 mm	3,0 mm	4 pcs.	1274053
35 mm²	10 mm	10,4 mm	11,2 mm	8,4 mm	16,5 mm	16,0 mm	41,1 mm	2,6 mm	4 pcs.	1274054
50 mm²	8 mm	8,1 mm	13,0 mm	10,4 mm	18,3 mm	19,1 mm	46,7 mm	3,3 mm	4 pcs.	1274056
50 mm²	10 mm	10,4 mm	13,0 mm	10,4 mm	18,3 mm	19,1 mm	46,7 mm	3,3 mm	4 pcs.	1274057
70 mm²	8 mm	8,4 mm	14,6 mm	11,3 mm	21,3 mm	24,0 mm	54,0 mm	3,3 mm	2 pcs.	1274058
70 mm²	10 mm	10,5 mm	14,6 mm	11,3 mm	21,3 mm	24,0 mm	54,0 mm	3,3 mm	2 pcs.	1274059
95 mm²	10 mm	10,5 mm	17,4 mm	13,5 mm	25,3 mm	27,0 mm	60,0 mm	3,9 mm	2 pcs.	1274061
95 mm²	12 mm	13,0 mm	17,4 mm	13,5 mm	25,3 mm	27,0 mm	60,0 mm	3,9 mm	2 pcs .	1274062



1852 SEE ELECTRICAL PANEL W/AUTOMATIC FUSE LED 1852 SEE USB OUTLET

Rocker switches and built-in activation LED diode, red LED light shows switch out of operation and green LED shows it is in operation. Each switch with automatic fuse from 2-15 Amp.

3 switches + 1 on/off switch (2 x 5, 10 & 15 A) Str. 100 x 128 mm Hole size 82 x 107 mm 1270033

5 switches + 1 on/off switch (3 x 5, 2 x 10 & 15 A) Str. 100 x 180 mm Hole size 82 x 160 mm 1270034



and volt/ammeter 0-10 Amp. 1270178


Panel with volt/ammeter 6-30 Vdc - 0-10 Amp. 1270179



1852 S USB OUTLET

Double USB outlet 5V 1 and 2.1 Amp. 1270188

Double USB outlet 5V and 2.1 Amp and cigarette socket 12/24V 1270189



1852 ELECTRICAL PANEL WITH AUTOMATIC FUSE

Electrical panel with toggle switches and automatic fuse for 12V-20A/24V-10A.

Square illuminated display on which symbols can be applied.

6 switches (3 x 5, 2 x 10 & 15 A) Str. 120 x 180 mm Hole size 90 x 160 mm 1270136

8 switches (4 x 5, 2 x 10 & 2 x 15 A) Str. 120 x 235 mm Hole size 90 x 210 mm 1270137



• IP67

• SAE J1625, SAE J1171 (Sparkproof) €€

• Works in temperatures from -30 to +80°C

• Terminals: M6

• Simple reset function



135 Amp. 1271179

150 Amp. 1271180

1852 MAIN SWITCH

275 Amp. - 12-48 Vdc

Mounts in 52 mm mounting holes

The key can be removed

3 side plates can be removed for cable installation 68 x 68 x 75 mm

1271082



1852 **BATTERY SWITCH**

Compact battery changeover 275 Amp. - 12-48 Vdc Mounts in 52 mm mounting holes The key can be removed Simple and economical way to separate two batteries

68 x 68 x 75 mm

1270093



1852 FENDER COVER

1852 fender cover is made of thick stretch terry, which protects your fender and boat.

When the fender rubs against the boat, it can make an annoying creaking sound, which can be avoided by using a fender cover.

The fender cover also protects the fender from the sun's UV rays.

Size

54x17 cm

54x29 cm

59x22 cm

70x29 cm

89x32,5 cm

61x42,5 cm

93x42,5 cm

90x50 cm

Available in grey, navy and black

Lace closure at one end 80% acrylic 20% polyester

Can be washed

Fender cover for:

F1 Polyform 61x15 cm

F2 Polyform 61x22 cm

F02 Polyform 66x20 cm

F3 Polyform 74,5x22 cm

F4 Polyform 104x22 cm

F5 Polyform 77,5x29 cm

F6 Polyform 109x29 cm

F7 Polyform 102x37,5 cm



1151354

1151362

Fender cover for buoy fenders

	·, ·,						
A1 Polyform	Dia 40x37 cm	1 stk	1151275	1151280	1151288		
A2 Polyform	Dia 46x49 cm	1 stk	1151276	1151281	1151289		
A3 Polyform	Dia 65x56 cm	1 stk	1151277	1151282	1151290		

1 stk

1151346



Fender holder in dia 6 mm 316 stainless steel.

- Height 34 cm
- Included holder can be adjusted at any angle
- Sold in pairs

Internal dia Top/bottom	Fits (Polyform):	Fits (Majoni):	Fits (Danfender):	Item no	
140/110 mm	F01 S/M/L, G2	Star 1, Drop 1	5"	1151383	N
165/120 mm	F1, G3	Star 2, Drop 2	-	1151380	
185/135 mm	G4	-	6"	1151384	N
215/160 mm	F02, F2/3/4, G5	Star 3, Drop 3	8", Light	1151381	
265/220 mm	-	Star 4	10"	1151382	



1852 FENDER HOLDER

Strong and robust fender holders made of AISI 316 stainless steel with a material thickness of dia 8 mm. Available as a straight or angled model and supplied with mounting brackets. All holders are for 2 fenders.

	Fits (Polyform):	Fits (Majoni):	Fits (Danfender):	Straight	Angled left	Angled right
Fender max dia 175 mm L-410 B-175 H-280 mm	F1, G3/4	Star 2, Drop 2	6"	1151393	1151396	1151401
Fender max dia 225 mm L-530 B-225 H-330 mm	F02, F2/3/4, G5	Star 3, Drop 3	8", Light	1151394	1151397	1151402
Fender max dia 315 mm L-655 B-315 H-600 mm	F5/6	Star 5	12"	1151395	1151398	1151403

Mounting bracket set for fender holders 1151405









The ideal polishing machine for the boat, the car etc.

- Oscillating rotation
- 900W
- Adjustable speed 2000 6400 revolutions
- Comes with handle, back plate w/velcro and bag
- 2.6 kg
- Ø 150 mm
- **(€** approved

1760248

Back plate for dual action 8 mm / 5/8" Ø 135 mm 1602135



1852 SEE ELECTRIC POLISHING MACHINE - SMALL AND LIGHT (€

A small and light polishing machine for the perfect polishing job. Weighs only 2 kg and is therefore somewhat more comfortable to perform the polishing work with.

• Stepless speed regulation 0-4300 rpm. Approx. Step 4 is perfect for the polishing task.

• 920W 230V

• Includes Ø 180 mm back plate with velcro

• Standard M14 mm thread Supplied with handle

• ONLY 2 kg.

• REMEMBER polishing pads (not included)

• **(€** approved 1760245



POLISHING PADS & ACCESSORIES

Microfibre cloth 1st piece 40 x 38 cm

Polishing kit: Rubbing and wax pad + microfiber cloth 1760260 1760255 Back plate with velcro - Ø 180 mm 1760262 Yellow waffled foam rubbing pad - Ø 200 mm Black waffled foam wax roundel - Ø 200 mm 1760265 Soft lambswool polishing pad with velcro - Ø 200 mm 1760268 Lamb's wool polishing pad with velcro - Ø 200 mm

1760269 1760273







1852 **WASHING BRUSH WITH WATERFLOW**

Washing brush with extra soft scratch-free bristles.

Solid design with good ergonomic rubber-coated handle.

Good grip, even when the handle is wet.

The rubber edge on the brush head protects the gelcoat from scratches.

Easy thumb control switch - turn water supply on/off.

Standard quick connector. Material: TPR, PP, PVC brush, ABS. Brush hair: 8 x 11 cm

Total length: 31 cm 1152462



1852 WASHING BRUSH W/STIFF BRISTLES & HANDLE

Washing brush with stiff bristles in fantastic good quality. Strong and solid handle with anti-slip grip. With rubber edges for protection. L: 190 mm • W: 90 mm • H: 95 mm Brush length: 28 mm 1152610



1852 BRUSH & SHAFT WITH WATERFLOW

Hedgehog Brush with/waterflow for shaft 1152600 Soft washing brush w/waterflow & water scraper 1152603 Telescopic shaft w/waterflow & on/off switch 1.2-1.8 meters 1152601 Shaft w/waterflow & on/off switch 1.4 metres 1152602





- Boat brush for telescopic rod
- Top in white plastic
- Brush head in high quality polyester fibres
- Quick coupling

Telescopic brush handle 100-175 cm 1152542 Telescopic brush handle 150-274 cm 1152543 Hard brush 20 cm (white) 1152547 Medium brush 20 cm (blue) 1152548 Soft brush 20 cm (yellow) 1152549



1852 **BRUSH SET** • Aluminum telescopic shaft 122 cm

- A stiff brush
- A soft brush
- Boat chin tip that fits on shaft 1152520





EVA SHEET FENDER


- Does not absorb liquid Easy to stack and store Easy to clean
- Robust fender that neither punctures nor loses air
- Foam plastic fender can also be used as a seat pad
- Blue/petrol

Lgt.	Width	Thickness	Item no	TA	9
	20 cm	5 cm	1151800	177	
	30 cm	7,5 cm	1151810		
90 cm	30 cm	7,5 cm	1151820	Į.	
		1	-	-	

ELECTRIC TRAILER WINCH RP2000 C€

IP67 • Free-running function • Incl. relay • Tow hook • Wireless remote control

Model:	RP2000
Boat weight:	app. 600 kg
Drag:	907 kg
Engine:	12V - 1,9HK
Gearing:	153:1
Gear:	Planet gear with automatic stop
Wires:	Dia 4 mm 15 meter
Dim in mm:	285,5 x 113 x 107,5
Weight:	6,5 kg
Item no	1021080



Spare wireless remote control for RP2000 1021087

ROOK ELECTRIC TRAILER WINCH RP3500 (€

IP67 • Free-running function • Line guide • Incl. relay • Towbar Remote control w/cable

Model:	RP3500 w/rope	RP3500 w/steel		
Boat weight:	app. 10	050 kg		
Pull:	158	9 kg		
Motor:	12V -	3,1HK		
Gearing:	136:1			
Gear:	Planet gear with automatic stop			
Rope:	Ø 5,56 mm 12,8 m			
Dim in mm:	363 x 117 x 120			
Weight:	9,9 kg	11,3 kg		
Item no	1021081	1021082		

Waterproof control box for RP3500 1021074







ELECTRIC TRAILER WINCH RP5000

IP67 • Free-running function • Line guide • Incl. relay • Towbar Remote control w/cable

Model:	RP5000 w/rope	RP5000 w/steel	
Boat weight:	app 1	L500 kg	
Pull:	22	68 kg	
Motor:	12V -	- 3,8HK	
Gearing:	165:1		
Gear:	Planet gear with automatic stop		
Rope:	Ø 6,3 mm 15 meter		
Dim in mm:	397 x 117 x 120		
Weight:	13,2 kg	15,3 kg	
Item no	1021083	1021084	

Waterproof control box for RP5000 1021074







ROGK ELECTRIC TRAILER WINCH RES6000 (€

IP66 • Free-running function • Line guide • Incl. relay • Towbar Remote control w/cable

Model:	RES6000 w/rope	RES6000 w/steel		
Boat weight:	app. 1	850 kg		
Pull:	272	0 kg		
Motor:	12V -	4,6 HK		
Gearing:	210:1			
Gear:	Planet gear with automatic stop			
Rope:	Dia 7 mm 24 meter			
Dim in mm:	452 x 161 x 217			
Weight:	25,5 kg	29,5 kg		
Item no	1021105	1021085		





ROOK ELECTRIC TRAILER WINCH RES9500 (€

IP67 • Free-running function • Line guide • Incl. relay • Towbar Remote control w/cable

Model:	RES9500 w/rope	RES9500 w/steel	
Boat weight:	app. 2	.900 kg	
Pull:	431	L3 kg	
Motor:	12V -	4,9HK	
Gearing:	150:1		
Gear:	Planet gear with automatic stop		
Rope:	Dia 9,5 mm 28 meter		
Dim in mm:	540 x 161 x 217		
Weight:	28,6 kg	37,2 kg	
Item no	1021106	1021086	







WIRELESS REMOTE CONTROLS

Wireless remote control for RP3500, RP5000, RES6000 og RES9500 **1021088**

Wireless remote control for RP3500 & RP5000 12V 250 Amp 1021073

Wireless remote control for RES6000 & RES9500 12V 400 Amp 1021089






PULL SPEED AND CAPACITY

Model	Pull	Speed	Amp.
	0 kg	4,3 m/min	14
PR2000	454 kg	2,7 m/min	60
PR2000	680 kg	2,3 m/min	90
	908 kg	1,8 m/min	115
Model	Pull	Speed	Amp.
	0 kg	7,0 m/min	35
DD2500	454 kg	6,0 m/min	87
RP3500	908 kg	4,6 m/min	140
	1589 kg	2,3 m/min	200
Model	Pull	Speed	Amp.
	0 kg	6,3 m/min	34
	908 kg	4,6 m/min	135
RP5000	1360 kg	4,0 m/min	155
	1810 kg	3,2 m/min	190
	2270 kg	2,8 m/min	230
Model	Pull	Speed	Amp.
	0 kg	6,0 m/min	80
	680 kg	4,8 m/min	125
RES6000	1360 kg	4,1 m/min	160
	2040 kg	3,2 m/min	205
	2720 kg	2,7 m/min	220
Model	Pull	Speed	Amp.
	0 kg	11,6 m/min	70
	1810 kg	3,8 m/min	198
RES9500	2720 kg	3,0 m/min	246
	3630 kg	2,5 m/min	284
	4313 kg	2,1 m/min	330

1852 OIL EXTRACTOR 9 LITRES

Oil suction with hand pump incl. 3 hoses of dia 4, 6 and 10 mm, all 110 cm long.

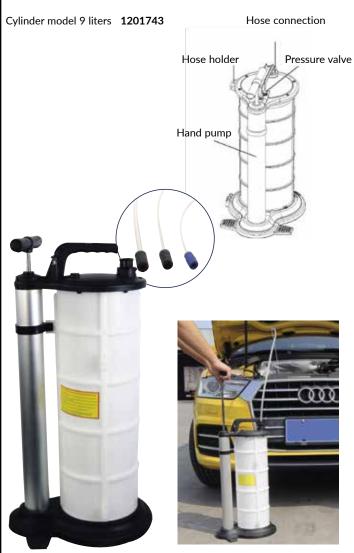

1852 See OIL EXTRACTOR 6 LITRES



1852 ■ MARINE TANK (€

Fuel tank with hose set for Yamaha.

Very solid petrol tanks produced in heavy duty polyethylene.

The tanks are supplied with a fuel gauge, 3 meter fuel hose with pump and Yamaha fuel couplings.

(Fuel hose: 2.05 m before pump and 0.85 m after pump) Change any the motor connector to match your motor,

12 L. 1530006 24 L. 1530007



1852 ■ FUEL CADDY 53 LITERS CE

Fuel wagon of 53 liters with wheels and siphon pump/gun Quality tank in polyethylene, CE approved

- No corroding parts
- Strong can withstand impact
- Mounted with 3 m hose
- For petrol and diesel

1530148



1852 FLASTIC FUEL CAN INCL. POURING SPOUT



SIPHON PUMP - MANUAL

Siphon with manual pump for chemicals, thinners and acids.

Can be used for petrol, diesel, chemicals, soap, thinner and acids up to 35%. Pumps 7 liters per mine.

Total length: 530 mm Lgd. on suction hose: 385 mm Lgd. on extraction hose: 540 mm 1531101



Battery-powered pump with autostop sensor. Can be used for petrol, diesel, kerosene, light oils and water. Pumps 9 liters per min and uses 2 D batteries.

Batteries are purchased separately

Total length: 592 mm Length of suction hose: 385 mm Length of extraction hose: 560 mm



SIPHON PUMP - BATTERY OPERATED W/AUTOSTOP

Battery-operated pump with autostop. Live. with adapters for mounting on different cans. Used for petrol, diesel, kerosene, light oils and water. Pumps 9 liters per min and uses 4 AA batteries.

Total length: 535 mm Length of suction hose: 460 mm Length of extraction hose: 715 mm 1531104







Durable edge with elastic

tection


1852 SEE BOAT COVER

1852 high quality boat cover.

Made from 300 denier gray polyester which is water resistant and comes with trailer straps. The Cover protects against rain, dirt and dust.

Available in 8 models, of which the 2 smallest are for inflatable boats and smaller dinghies. In addition, there are 3 models for Center Console boats.

- 300 Denier Polyester
- Reinforced bow, stern & eyes
- Trailer straps Included
- Storage bag included





100% coated polyester

fabric, provides greater

8 models:

Model	Size	Fot	Max width	Item no
Mini	240-300 cm	8-10"	155 cm	1041828
Junior	300-360 cm	10-12"	175 cm	1041829
XS	360-420 cm	12-14"	173 cm	1041831
S	427-488 cm	14-16"	173 cm	1041832
М	427-488 cm	14-16"	229 cm	1041833
L	488-564 cm	16-18,5"	239 cm	1041834
XL	518-579 cm	17-19"	244 cm	1041835
XXL	610-670 cm	20-22"	254 cm	1041836

1852 SSS OUTBOARD COVER

1852 outboard Cover is made of strong blue 600D polyester material for maximum protection, supplied in a storage bag.

Model	ltem no
2,5-10HP	1041853
15-25HP	1041854
25-40HP	1041855
50-115HP	1041856
115-250HP	1041857






1852 BOAT SUPPORTS FOR MOTOR AND SAILBOATS

Adjustable boat supports in solid steel with black powder coating, which makes them more durable and ensures a longer life. Rubber protection on the hull plate protects against scratches, while also providing good support for the boat.

Two supports are calculated per 8-10 feet.



Boat support for motor boats Max load 2500 kg


Hight	Item no
50-80 cm	1531161
60-90 cm	1531162
75-105 cm	1531163
90-120 cm	1531164



Boat support for sailboats
Max load 1250 kg

Hight	Item no
80-120 cm	1531171
110-155 cm	1531172
130-175 cm	1531173
150-195 cm	1531174
170-215 cm	1531175
190-235 cm	1531180

Foldable



Hight	Item no
35-55 cm	1531169



Accessories for boat supports	Item no
	1531165
Flat top plate	1531166
Rubber sheet 20x20 cm for top plate	1531167





1531167

1852 PROFLEX BOAT-SHAPED AND RECTANGULAR COVERS

A cover protects against wind and weather. But it must be able to do much more. It must also be able to be used again and again. And then it must be easy to work with. 1852 boat shaped tarps provide a better fit and less excess tarp. The cover is sewn to form at one end, so that any excess material against the bow is minimized.

- 240 g./m2 reinforced plastic in top quality the best protection for the boat in all kinds of weather!
- Long service life withstands frost and sun without cracking. From -40° to 80°C.
- High UV protection protects against sunlight.
- Environmentally friendly and economical made from environmentally friendly HDLD polyethylene (high density polyethylene), which can be reused and does not pollute when
- There are pre-punched holes (Dia 15 mm) every 10 cm, the holes are welded for good durability.

Cloth type: 100% polyethylene HDPE leno material, LDPE coating (high density

polyethylene tablecloth with low density polyethylene coating)

Fabric weight: 220 g/m2 Cover weight: 230-250 g/m2

Tensile strength: 580 N/5 cm in the longitudinal direction = 59 kg.

440 N/5 cm in the width direction = 45 kg.

Temp. resistant: -40/+80°C UV resistant: 200 Kly

Finished size, +/- 2% Size:

Finishing: Eye tape in the longitudinal direction. 250 g/m2 with Ø 15 mm eyelets every 10 cm Eyelet:

Eye tensile strength: 580 N = 59 kg.

RECTANGULAR COVER

Size	Item no
3 x 4 meter	1041702
4 x 6 meter	1041708
5 x 7 meter	1041710
6 x 10 meter	1041712
8 x 12 meter	1041711



SHAPED COVER


Size	Item no
5 x 7 meter	1041693
5 x 10 meter	1041694
6 x 10 meter	1041697
6 x 12 meter	1041699
7 x 12 meter	10416991
8 x 14 meter	1041701




THE ADVANTAGES OF THE 1852 COVER:

- Flexible attachment pre-punched holes/eyes every 10 cm
- No metal eyes = no scratches in gelcoat
- High tensile strength





Punched-out eyelets on large parts of the cover make fastening much easier




The boat-shaped covers are tapered after 2/3 of the total length.


The narrow short side is half as long as the width of the cover.





hor EXHAUST SILENCER



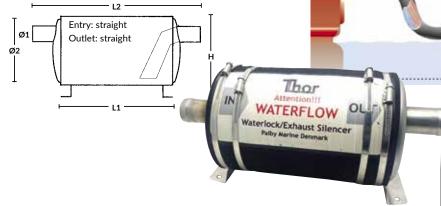

MAX HP	Ø1	Ø2	L1	L2	Н	Liters	Item no
35	45 mm	127 mm	250 mm	400 mm	145 mm	3.0	152P1001
35	51 mm	127 mm	250 mm	400 mm	145 mm	3.0	152P1002
50	40 mm	160 mm	250 mm	420 mm	190 mm	5.0	152P1013
50	45 mm	160 mm	250 mm	420 mm	190 mm	5.0	152P1011
50	51 mm	160 mm	250 mm	420 mm	190 mm	5.0	152P1012
100	51 mm	160 mm	375 mm	560 mm	190 mm	7.5	152P1015
100	60 mm	160 mm	375 mm	560 mm	190 mm	7.5	152P1017
100	63 mm	160 mm	375 mm	560 mm	190 mm	7.5	152P1018
100	76 mm	160 mm	375 mm	560 mm	190 mm	7.5	152P1020
150	76 mm	203 mm	375 mm	760 mm	215 mm	12.5	152P1031
200	89 mm	203 mm	375 mm	760 mm	215 mm	12.5	152P1035
200	89 mm	203 mm	500 mm	760 mm	215 mm	15.0	152P1036
200	101 mm	203 mm	500 mm	760 mm	215 mm	15.0	152P1037
300	101 mm	245 mm	500 mm	775 mm	260 mm	25.0	152P1041
300	124 mm	245 mm	500 mm	775 mm	260 mm	25.0	152P1042

125 mm

140 mm


170 mm

1852 **EXHAUST PIPES**

NOTE: Must be fitted longboard

Beautiful fully cast stainless steel, AISI 316, through for exhaust. High gloss polished w/plastic counter flap.

A-Hose dia	B-Lgt.	C-Total lgt	Item no
40 mm	75 mm	99,5 mm	1514881
45 mm	75 mm	100,0 mm	1514882
51 mm	75 mm	101,0 mm	1514884
60 mm	75 mm	102,5 mm	1514885
76 mm	90 mm	122,4 mm	1514888
90 mm	110 mm	144,5 mm	1514890
100 mm	115 mm	150,0 mm	1514892
125 mm	140 mm	184,0 mm	1514893
150 mm	150 mm	196,0 mm	1514894



hor EXHAUST PIPES

Item no	Ø1	Ø2	L
152P1150	38 mm	78 mm	130 mm
152P1151	45 mm	85 mm	130 mm
152P1152	51 mm	91 mm	130 mm
152P1154	60 mm	100 mm	130 mm
152P1155	63 mm	103 mm	130 mm
152P1156	76 mm	126 mm	130 mm
152P1157	89 mm	139 mm	130 mm
152P1158	101 mm	151 mm	130 mm
	1		1
Item no	Ø1 mm	Ø2 mm	L mm
152P1160	38 mm	88 mm	125 mm
152P1161	45 mm	95 mm	125 mm
152P1162	51 mm	101 mm	125 mm
152P1163	57 mm	107 mm	125 mm
152P1164	60 mm	110 mm	125 mm

63 mm

76 mm


89 mm

113 mm

126 mm

139 mm

101 mm | 151 mm | 190 mm

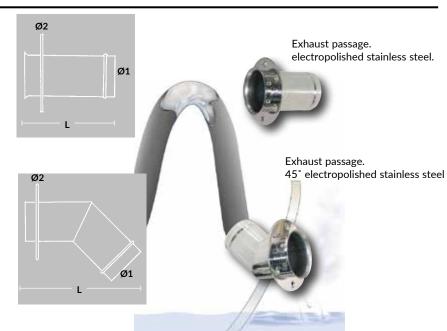

152P1165

152P1166

152P1167

152P1168

Thor EXHAUST ELBOWS



Volvo MD 1-3, 6, 7, 11, 17 The coolant spigot points to the rear 152P1221

Total lgt 235 mm 1 1/4" thread



Volvo MD 1-3, 6, 7, 11, 17 -The coolant spigot points forward 152P12211

Total lgt 235 mm 1 1/4" thread



Volvo MD 1-3, 6, 7, 11, 17 W/flange. The coolant spigot points to the rear 152P12215



Volvo MD 1-3, 6, 7, 11, 17 - Speciel W/flange. The coolant spigot points forward



Volvo MD 22 152P1222

Total lgt 160 mm










Yanmar QM serie 152P1224

Total lgt 245 mm 1 1/2" thread










Yanmar 4JHE 152P1236


Total lgt 165 mm





INFO WAKEWATER





SIMPLE CIRCUIT COOLING

DOUBLE CIRCUIT COOLING

Cool facts about how to avoid an anti-siphon that leaks in the engine room or how to prevent clogging in the cooling system.

The cooling water intake is the first connection that can release particles from the cooling water. It is therefore important that a strainer is fitted on the outside which does not allow larger particles to pass through the hose. For safety reasons, the feed-through should be fitted with a tap that can shut off the water in the event of an accident, repair etc.

Note that the cooling water strainer has an inlet and an outlet that must be connected correctly. The strainer must be checked for dirt and be cleaned where it is mounted, and must fit tightly in the lid. It is important that the strainer is placed approx. 0.5 meters above the waterline and that the hoses are of a good quality that do not "collapse" in a hot engine room and prevent water from passing through.

The strainer's outlet is connected to the pump's inlet connection, and via the pump's outlet connection to the anti-lift siphon, which must be located at roughly the same height as the strainer.

The anti-lift siphon has no specific flow direction. It breaks the water flow and thus the siphon effect when the engine is stopped. The outlet of the siphon is connected to the motor and the circuit is closed. The anti siphon is connected to the spigot on the silencer. If there is no spigot on the muffler, you can mount a connecting pipe on the exhaust hose after the engine exhaust silencer as close to the muffler as possible.

Thor ANTI-LIFT SIPHON

Powerful anti-siphon. Fits 16-19-25-32 mm hoses. Can be connected to exhaust if one want a closed installation. Dimensions: H: 163 - W: 85 - D: 37 mm Stud Ø 8 mm

16-19-25-32 mm 1560692



Thor QUICK-FIT SEA STRAINER

Luxury strainer for the discerning sailor. The strainer is mounted on the practical QUICK-FIT hanger, which makes it easy to mount and quick to clean. Extra strong walls provide great stability, and the large strainer provides extra flow.

Thor filter 12–16–19 mm **1560470** Thor filter 19–25–32 mm **1560480**

	1560470	1560480
Sl. dia	12-16-19	19-25-32
Dia.	123	168
В	130	175
С	115	145
Hight	205	245




SPARE PARTS FOR STRAINER

Lit for 1560470	1560472
Sieve for 1560470	1560473
O-ring for 1560470	1560474
Holder for 1560470	1560475
Lit for 1560480	1560482
Sieve for 1560480	1560483
O-ring for 1560480	1560484
Holder for 1560480	1560/85







Examples shown are for engine cooling: Seawater intakes are always installed with the strainer against the direction of sailing for engine cooling and with the direction of sailing for toilet water intakes

HOSE CLAMP AISI 316 STAINLESS STEEL

British type 316 stainless steel turnbuckle with a galvanized 316 stainless steel screw for maximum strength.

The smooth inner profile of the tension band and the round edge provide protection for all hose types

Dia.	Width	Max moment	No	Item no
11-16 mm	9,7 mm	3Nm	10 pcs.	1540320
11-16 mm	9,7 mm	3Nm	2 pcs.	1540321
13-20 mm	9,7 mm	3Nm	10 pcs.	1540322
13-20 mm	9,7 mm	3Nm	2 pcs.	1540323
18-25 mm	11,7 mm	4,8Nm	10 pcs.	1540324
18-25 mm	11,7 mm	4,8Nm	2 pcs.	1540325
25-35 mm	11,7 mm	4,8Nm	10 pcs.	1540326
25-35 mm	11,7 mm	4,8Nm	2 pcs.	1540327
32-45 mm	11,7 mm	5,2Nm	10 pcs.	1540328
32-45 mm	11,7 mm	5,2Nm	2 pcs.	1540329
40-55 mm	11,7 mm	5,2Nm	10 pcs.	1540330
40-55 mm	11,7 mm	5,2Nm	2 pcs.	1540331
55-70 mm	11,7 mm	5,2Nm	10 pcs.	1540332
55-70 mm	11,7 mm	5,2Nm	2 pcs.	1540333
70-90 mm	11,7 mm	5,2Nm	10 pcs.	1540334
70-90 mm	11,7 mm	5,2Nm	2 pcs.	1540335
90-120 mm	11,7 mm	5,2Nm	10 pcs.	1540336
90-120 mm	11,7 mm	5,2Nm	2 pcs.	1540337
150-180 mm	11,7 mm	5,2Nm	1 pcs.	1540340
180-210 mm	11,7 mm	5,2Nm	1 pcs.	1540342





1852 HOSE CLAMP AISI 304 STAINLESS STEEL

29

	HOJE C	LAIVIF AISI S	74 J I AI	IAFF22 21
Dia.	Width	Max moment	No	Item no
8-12 mm	8 mm	6Nm	10 pcs.	1544739
8-12 mm	8 mm	6Nm	2 pcs.	1544800
6-16 mm	8 mm	6Nm	10 pcs.	1544740
6-16 mm	8 mm	6Nm	2 pcs.	1544801
11-20 mm	8 mm	6Nm	10 pcs.	1544741
11-20 mm	8 mm	6Nm	2 pcs.	1544802
13-23 mm	12,7 mm	6Nm	10 pcs.	1544745
14-27 mm	12,7 mm	6Nm	10 pcs.	1544746
14-27 mm	12,7 mm	6Nm	2 pcs.	1544804
18-32 mm	12,7 mm	6Nm	10 pcs.	1544747
21-38 mm	12,7 mm	6Nm	10 pcs.	1544748
21-38 mm	12,7 mm	6Nm	2 pcs.	1544806
21-44 mm	12,7 mm	6Nm	10 pcs.	1544749
27-51 mm	12,7 mm	6Nm	10 pcs.	1544750
33-57 mm	12,7 mm	6Nm	10 pcs.	1544751
33-57 mm	12,7 mm	6Nm	2 pcs.	1544809
40-64 mm	12,7 mm	6Nm	10 pcs.	1544752
46-70 mm	12,7 mm	6Nm	10 pcs.	1544753
50-76 mm	12,7 mm	6Nm	10 pcs.	1544754
50-76 mm	12,7 mm	6Nm	2 pcs.	1544812
59-82 mm	12,7 mm	6Nm	10 pcs.	1544755
65-89 mm	12,7 mm	6Nm	10 pcs.	1544756
65-89 mm	12,7 mm	6Nm	2 pcs.	1544814
91-114 mm	12,7 mm	6Nm	10 pcs.	1544757
91-114 mm	12,7 mm	6Nm	2 pcs.	1544815
103-127 mm	12,7 mm	6Nm	10 pcs.	1544758
103-127 mm	12,7 mm	6Nm	2 pcs.	1544816
117-140 mm	12,7 mm	6Nm	10 pcs.	1544759
117-140 mm	12,7 mm	6Nm	2 pcs.	1544817
141-165 mm	12,7 mm	6Nm	10 pcs.	1544760
141-165 mm	12,7 mm	6Nm	2 pcs.	1544818





HEAVY HOSE CLAMPS A2 AISI 304

Heavy buckle strap. Stainless steel AISI 304. With umbraco screw

Dia.	Item no
17-19mm	1544012
20-22mm	1544014
23-25mm	1544015
26-28mm	1544016
29-31mm	1544017
32-35mm	1544018
35-40mm	1544020
40-45mm	1544040

Item no
1544060
1544070
1544080
1544090
1544100
1544110
1544120
1544130

Dia.	Item no
85-90mm	1544140
90-95mm	1544150
95-100mm	1544160
100-105mm	1544170
105-110mm	1544180
110-115mm	1544190
115-120mm	1544200
123-130mm	1544460

Dia.	Item no
131-140mm	
141-150mm	1544490
151-160mm	1544492





STRAHL GLASS

Strahl glass is produced in polycarbonate - an unbreakable material with the same elegance and clarity as glass. The glasses appear in an elegant design and without machine joints - which gives an incredibly nice finish. Strahl glass is a safe and durable alternative to regular glass and can be washed in the dishwasher.

Jug 1567 ml. 1 piece 1851769 Wine glass 384 ml. 4 pieces. 1851771 Glass Rocks 296 ml. 6 pieces. 1851772 Glass Vivaldi 414 ml. 6 pieces. 1851773 Stemless wine glass 384 ml. 4 pieces. 1851774 Glass Highball 296 ml. 4 pieces. 1851775 Glass Highball 414 ml. 4 pieces. 1851776 Shot glass 35 ml. 12 pcs. 1851777 Beer mug 443 ml. 4 pieces. 1851778





















1851775









GLASSES IN A NICE GIFT BOX

Champagne glass 166 ml. 4 pieces. 1851764 Wine glass 245 ml. 4 pieces. 1851765 Stemless wine glass 247 ml. 4 pieces. 1851766 Beer glass 285 ml. 4 pieces. 1851767 Glass of Rocks 355 ml. 6 pieces 1851768



1851767





1851768

1852 **SEE KETTLE**

Kettle that can be used for both gas and induction. Whistles when the water boils

1.2 liters • Ø 165 mm. Height 125 mm 1851795

2,3 liters • Ø 183 mm. Height 130 mm 1851798



TEAK TABLETOPS

Thai teak wood and genuine craftsmanship are an unrivaled combination. For centuries, teak wood has proven to be unsurpassed for outdoor use. The natural oils preserve the wood against weather and wind for years. Teak wood is also resistant to insects and fungi.

Each part is machined and sanded before assembly. The furniture is put together by hand and fit and craftsmanship are carefully coordinated. Finally, the surface is polished to a silky matte finish.

The teak table tops have plywood cores. 22 mm thick, of which 5 mm teak.

FSC-approved teak wood

The joint is made with SIKA-flex.

Teak tabletops square

Size Item no 35 x 60 cm 1122150 1122151 50 x 75 cm

Teak table top with round corners 1122152

60 x 95 cm

Foldable teak table tops

Comes with strong supports that can be pushed out from under the plate,

to hold the sides when they are unfolded








WELCOME ON BOARD MATS

- Navy blue with white text
- Strong edging tape
- Anti-slip coating on the backside

Square w/ "Welcome aboard" motive, 61x45 cm Semi-round w/woven compass motive, 91x47 cm Long mat 45x150 cm Square w/woven anchor motive, 61x45 cm














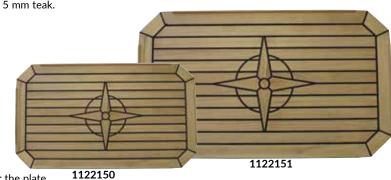



1122152



1122154

Adjustable back-

packs so it can be

Waterproof,

material on the

reinforced

bottom

carried easily

1852 FOLDING SEAT WITH ARMRESTS AND 6 SETTINGS

Can be used as a comfortable seat with backrest or fold it out and use it as a cushion/mattress

- 6 different settings
- Armrests for good comfort, the armrests can also be folded into the seat for a larger sitting surface
- Bottle holder on armrest
- Lightweight steel construction
- 300 D polyester
- 7 cm foam in the back and seat
- Waterproof, reinforced material on the bottom
- Adjustable backpack straps for easy carrying

• Width: 52 cm • Length: 82 cm

Navy 1121430



Armrests folded down into the seat for a larger sitting surface



Can be used as a comfortable seat with backrest or fold it out and use it as a cushion/mattress

• 6 different settings

• Lightweight steel construction

• 300 D polyester

• 7 cm foam in the back and seat

• Waterproof, reinforced material on the bottom

Carrying handle

Width: 40 cm • Length: 75 cm

1121425 Navy

Width: 48 cm • Length: 93 cm

1121427 Navv

> Click the seat in 6 different positions



The cushion that keeps you warm when you are in good company on your boat in the harbor - or during a longer sailing trip on the open sea.

You can take NATES with you everywhere and keep warm in all kinds of weather.

NATES has three heat levels, as you know them from the seat heater in your car.

The cushion keeps heat from 3-6 hours, depending on which setting/level of heat you use.

Comes with water-resistant fabric, waterproof zipper and a 10,000 mAh power bank inside the cushion. Size 40 x 40 x 5 cm

1121435

ON/OFF

Press for 2 sec. for ON or OFF. A single press changes the heat level: Red = high (9.5W)Orange = medium (7W)

Green = low (5W)

 Heating element Surface temperature: Max. 40°C at highest level Warm-up: <1 min.

• Handle / shoulder strap Handle can be unbuttoned so it becomes a shoulder strap










1852 湯蘇

1852 STORM MULTI-TOOL 16 IN 1

1852 Storm Multi tool of 3CR13 stainless steel.

A very strong and powerful multi-knife and a knife blade that is particularly useful for cutting rope with and also a special rope cutter blade (no. 8).





Incl. bit set, the bit holder is mounted on the screwdriver

1852 FLAGPOLE TEAK FSC approved teak flag game with fitted teak cleat and stainless bushing. Dia 25 mm

Bushing Dia 25 x 45 mm 1123200 60 cm teak 75 cm teak 1123210 1123220 90 cm teak 120 cm teak 1123230

Bushing Dia 25 x 100 mm



1852 SHORT RUBBER BOOT

The 1852 rubber boot is a really good boot designed for sailing. The boot is made of soft rubber with a good inner sole with the wellknown non-slip sole (razor cut sole), which does not make marks on

The 1852 rubber boot is 100% waterproof and has reinforcements on the heel, instep and toe.

• 100% rubber

• The well-known non-slip razor cut sole

• Removable, padded insole

• Reinforced heel, toe and instep

• Quick-drying polyester lining

• Really good fit

• Colour: Gray with light grey/red reinforcements

• Size 37-47

1303920-(str.)



1852 NEOPRENE SHOES & BOOTS

Neoprene shoes size 33-47 Neoprene boots size 36-47 Shoes 1352512-(str.)

Boots 1352513-(str.)



1852 SAILING GLOVES WITH SILICONE GRIP

Fantastic sailing gloves without fingers with extremely good and durable silicone grip.

• Perfect fit

• Velcro closure • Extremely durable silicone grip

Size Item no XS 1352120-XS S 1352120-S Μ 1352120-M 1352120-L L XL1352120-XL



1852 WATERPROOF BAGS

Waterproof bag with shoulder strap.



1852 WATERPROOF BAG

Waterproof bag in PVC. Small and handy, perfect for short boat trips, camping, leisure and training. A waterproof pocket on the inside for keys, wallet and mobile phone. Small outer pocket with zipper.

Supplied with strong handles and carrying strap, which can be clipped on. 20 L

46 x 25 cm **1354250**



1852 WATERPROOF BACKPACK

Waterproof backpack.
Perfect for boat trips, kayak trips etc.
Keeps clothes and other accessories dry.
24 ltr 1354239



1852 WATERPROOF BACKPACK 30 LITERS



50N buoyancy. Comfortable and functional floating suit.

- Supplied in tote bag.
- The suit meets the requirements for buoyancy according to EN ISO 12402-6
- We always recommend a life jacket together with a floating suit. And especially children must always wear a life jacket.
- Red/black or Yellow/black with reflectors

Size	Red/black
120	1185122-120
140	1185122-140
160	1185122-160

Size	Weight	Chest	Gul/sort
XS			1185123-XS
S	→80 kg	84-92 cm	1185123-S
М	80-85 kg	92-100 cm	1185123-M
L	85-90 kg	100-108 cm	1185123-L
XL	90-110 kg	108-116 cm	1185123-XL
XXL	110-120 kg	124-132 cm	1185123-XXL



A good vest for fun on the water.

Soft foam

• Reflex on shoulder

• 4 belts with click buckle

• EN ISO 12402-5

Chest Black/lime Kg 30 - 50 kg 71-91 cm 1188954 50 - 70 kg 91-111 cm 1188955 111-127 cm 1188956 70+ kg



1852 SO ACTIVE SWIM VEST 50N CE

Comfortable swimming vest with good fit. Solid color with zipper, drawstring and laces.

	Red/black	Navy/grey
30 - 50 kg	1188940	1188945
50 - 70 kg	1188941	1188946
70 - 90 kg	1188942	1188947
90+ kg	1188943	1188948



1852 ₹ 165N AUTOMATIC VEST (€

A fully automatic inflatable lifejacket that has a compact and slim design.

Available with or without harness • 165 N buoyancy with 33 gram CO² cartridge

• 600 denier fabric material

• Velcro closure for easy repacking • Halkey-Roberts trigger mechanism

• Zip pocket

• ISO 12402-3 approved

• Approved under class 150N

Vest 165N Navy **1186032** Red **1186033**

Co² cartridge 33g incl. tablet Halkey-Roberts 1186050





1852 ISO DINGHY/KAYAK VEST 50N C€

A vest with really good freedom of movement in the arms. Maneuvering on the water is no problem with this vest.

• Soft foam

- Suitable for dinghy and kayak sailing
- Flexible shoulder strap
- Full zip
- Zip and Velcro pocket
- EN ISO 12402-5

Kg	Chest	Red/black
30 - 50 kg	71-91 cm	1188920
50 - 70 kg	91-111 cm	1188921
70+ kg	111-127 cm	1188922
70+ kg XXI	127-137 cm	1188923



Comfortable lifejacket with split buoyancy in front, back and collar. Comes with reflectors,

crotch strap, whistle and zipper.

Colour: Orange

3 - 10 kg	1188609
10 - 20 kg	1188610
20 - 30 kg	1188620
30 - 40 kg	1188630
40 - 60 kg	1188641
60 - 70 kg	1188650
60 - 70 kg	1188650
70 - 90 kg	1188660
+ 90 kg	1188670





1852 誤議

1852 FINANGULAR TUBE



DRAG LINES FOR TUBES

1852 line for 1 person tube 1852 line for 2 pers. tube, 18 metres

1191375 1191376






1852 SEE LINES FOR WATER SKIS

With grip - 23 m 1191300 With rubber coated wooden handle - 23 m 1191301 With aluminum handle 2 sections - 23 m 1191305 With aluminum handle covered with EVA foam

4 sections - 19 m 1191306





• 1 person triangle tube with nylon cover

• Tube Ø 137 cm

• Boston valves

• 4 handles

• 18 meter line






1852 **CRAZY BANANA**

1-3 people 260 cm

Nylon cover Quick release

3 pieces. oversize handle w/padded grip







Lots of handles for a safe ride, whether you're sitting on your butt or

Made of strong 840D nylon, knuckle protection under the handles and reinforcement on the seat surfaces.



DOUBLE DELTA TUBE

Sit in it, lie on your stomach or straddle the middle. Tube for two people, making it twice as fun. Strong nylon cover and double rings made of PVC.



1852 FUEL TUBE FOR 1 PERSON

• PVC inner tube • 420 denier cover



WATERSKI COMBO VEGA ADULT & JUNIOR

Classic combi skis that suit both the family, the all-round water skier but also the discerning water skier.

They are easy to get on, and have a narrow enough profile to be easy to maneuver in the turns.

Concave underside (curves downwards) for best grip on the water surface.

Adjustable bindings from size 37 to 46.

Red/orange 170 cm 1191006 Blue/yellow 145 cm junior 1191010





1852 SEE INFLATABLE SUP BOARDS JUNIOR & ADULT

Fantastic boards that can be used by both beginners and the experienced.

As the name suggests, the 2 Allround boards can be used for everything, but if you want to be challenged a bit, then you should try the Touring board, on which you can progress a little faster.

The touring board is a double layer board, which makes it stiffer and more stable.

• Versatile SUP boards - easy to maneuver with 1 removable center fin and 2 side fins

• Ultra stable

• Strong and durable

• For users of all levels - beginners as well as experienced

• Fully inflated in 5-10 min. (15 PSI max).

• Portable - easily rolled up and placed in the included backpack.

• Contains: SUP, bag, an adjustable aluminum paddle 165-215 cm, rep. set and a hand pump with manometer.

Model	Str.	Volume	Max carrying	Weight	Item no
300 alround	297 x 76 x 13 cm	210 L	110 kg	8 kg	1194136
320 alround	320 x 76 x 15 cm	304 L			1194137
365 tour	365 x 76 x 15 cm	320 L	150 kg	12,3 kg	1194138



ELECTRIC PUMP

Powerful pump that quickly inflates your SUP board.

12V pump for cigar plug.

Set to desired pressure, stops automatically.

- Pressure: 0-16 PSI
- LCD display
- Power cord: 3 m
- Hose: 1.1 m
- 6 adapters for different valves

Pump with 12V plug, 70 litres/min. 1193266

RECHARGEABLE ELECTRIC PUMP

The pump can be used to inflate e.g. your SUP board or deflate it.

The pump can both use the built-in lithium battery or 12V cigarette socket.

A charge takes approx. 7 hours

• Material: ABS

• Voltage: DC 12V

• Pressure: 0-16 PSI

• Accessories: air hose 1 m / USB cable for charging 5V/2Amp

• Power: 100W

• Battery capacity: Lithium battery, 4000mAH

• Airflow: 350(A)L/min 70(B)L/min can inflate and deflate

• 2 stage inflation: A stage: low pressure, fast inflation 350L/M B stage: High pressure, slow inflation 70L/M

• Size: 25.2 x 17.5 x 13.3 cm

• Weight: 9 kg

• LCD display

• 6 adapters for different valves

Pump with lithium battery, 70 to 350 litres/min. 1193268



1852 ₹ ROPE

 Mooring line PP black
 Item no

 Dia 10 mm 2 pcs. - 6 meters
 \$778.07507006

 Dia 12 mm 2 pcs. - 6 meters
 \$778.07507206

 Dia 14 mm 2 pcs. - 6 meters
 \$778.07507406

16 Braided PP rope white w/blue brand thread

Dia 10 mm 15 meters \$778.07823015

16 Braided PP rope black
Dia 12 mm 10 meters

\$778.07823210

3-Stripped PP rope black

 Dia 10 mm - 30 meters
 \$778.07911030

 Dia 12 mm - 30 meters
 \$778.07911230

 Dia 14 mm - 30 meters
 \$778.07911430

3-Stripped PP rope white - 30 meters

 Dia 10 mm - 30 meters
 \$778.07921030

 Dia 12 mm - 30 meters
 \$778.07921230

 Dia 14 mm - 30 meters
 \$778.07921430

3-Stranded Polyester/PP rope white w/nylon covs

Dia 12 mm - 35 meters \$778.07948235


1852 ROPE GAUGE

Rope gauge - used for rope from 6 to 20 mm It measures from 0.1 meter and up 1397205



1852 ROPE BURNER/CUTTER WITH BATTERY

1852 rope burner with rechargeable lithium battery 18V 2 Ah 90W Supplied in a strong plastic box with charger and cleaning brush. 1397206








1852 **TURNBUCKLE PROTECTOR**

Model	For cap screws	Navy	Grey
37 cm	8 & 10 mm	1153583	1153582
55 cm	11 & 13 mm	1153584	1153587



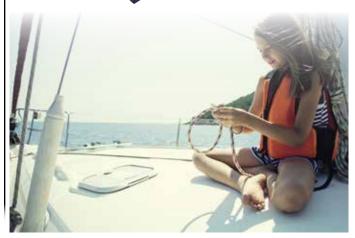

EXPORT ORDERS

Contact Jesper Cramer jk@palby.dk • +45 40 18 58 10

> Place an order at orders@palby.dk

All export orders are sent from Denmark























Korsvej 3 6000 Kolding Denmark

Office 500 m²





Dockplatsen 12 211 19 Malmø Sweden

Office 400 m²

Warehouse and Autostore 7.000 m² (Location: Denmark)





Skibåsen 37 4636 Kristiansand Norway

Office and warehouse 6.000 m²





